


Handheld Screwdriver pneumatic for special applications

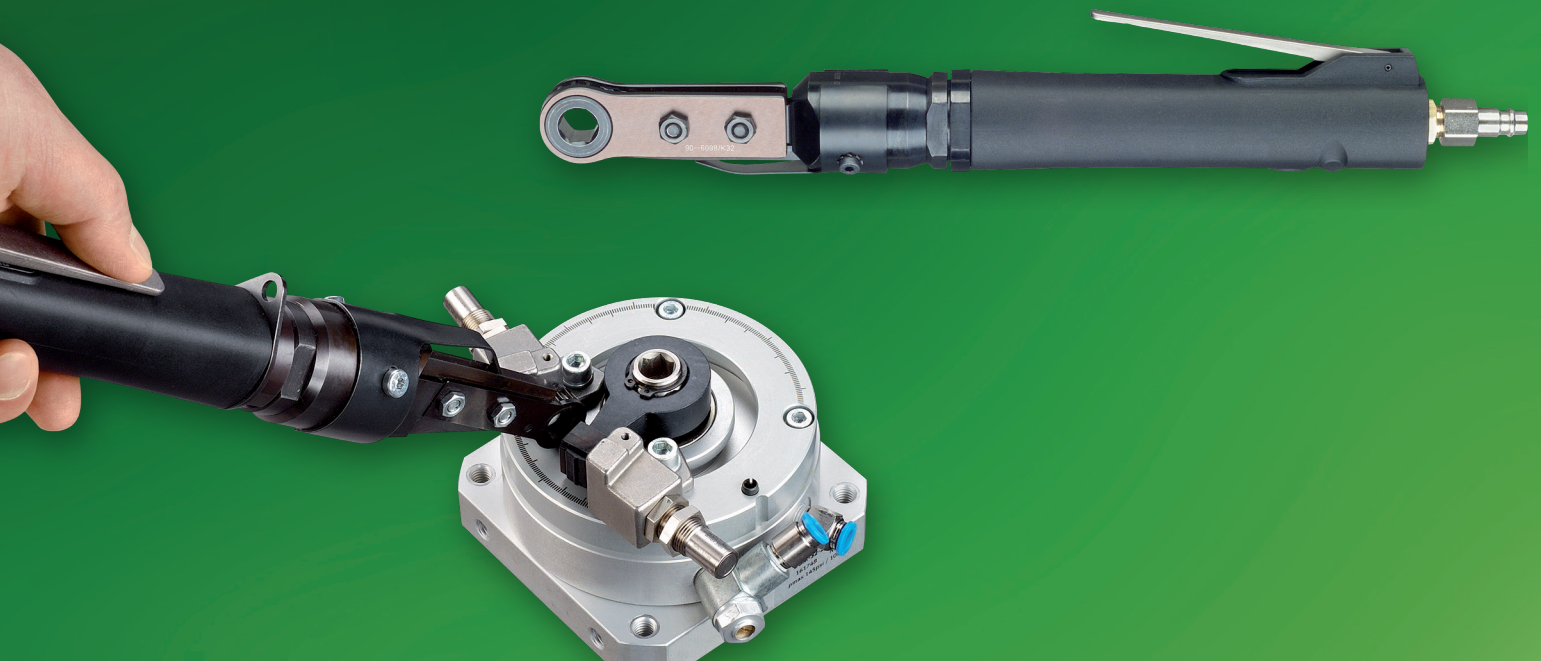

Flat Head Screwdriver

The solution for restricted spaces

For Screws of M3 (5-mm hex) to M18 (27-mm hex)

- ergonomic
- simple handling
- low noise level
- for work in confined areas


Our flat head screwdrivers are primarily used for screwdriving tasks in confined spaces. The flat head screwdriver comes with exchangeable sockets, even customer specific designs are available. The varying head length enables the screwdriver to adapt to fit any spatial conditions. If air supply is cut off they can also be tightened by hand.

Typical applications for the flat head screwdriver include assemblies of screw caps to hoses and pipes, e.g. in the car manufacturing industry.

As useful accessories, we offer affordable maintenance units, special lubrication oil for air-operated machines, as well as balancers and oil-resistant pressure-hoses.



TECHNICAL DATA - FLAT HEAD SCREWDRIVER with closed head

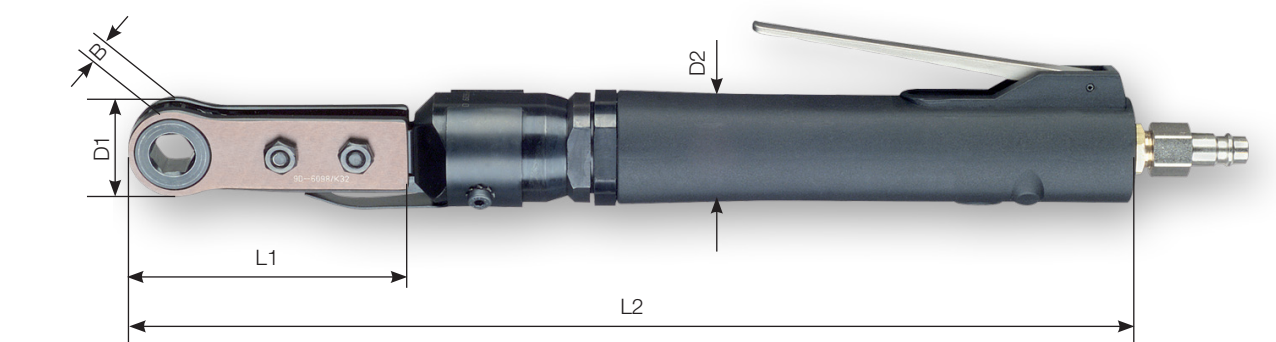

Design Version			Motor Size 2	Motor Size 3
Right rotation		Type	39-521-19K	39-331-46K
Lever start		Part no.	391625A	390518N
For screw thread sizes			M 3 - M 6	M 8 - M 18
For hex sizes	mm / in.		5-10/0.195 - 0.400	13-27/0.511-1.06
Speed, idling	rpm		90	110
Torque max. approx.	Nm / in.lbs		8.5 / 75.2	48 / 425
Air consumption	m³/min / cfm		0.36 / 12.7	0.4 / 14.1
Head thickness B	mm / in.		9 / 0.35	17 / 0.66
Head diameter D1	mm / in.		19 / 0.74	46 / 1.8
Grip diameter D2	mm / in.		30 / 1.17	40 / 1.56
Head length L1	mm / in.		69 / 2.7	115 / 4.5
Total tool length L2	mm / in.		319 / 12.5	358 / 14
Noise level	dB(A)		80	83
Weight complete	kg / lbs		1.15 / 2.53	1.7 / 3.74
Hose ID required	mm / in.		6 / 1/4	6 / 1/4
Connection thread			1/8" f	1/4" m
Included in delivery			Quick connect coupler and hose plug - 1 Socket insert with female hex *)	
Optional Equipment				
Exhaust hose, 1 m	Part no.		389653A	-

Technical data relate to an air pressure of 6.3 bar (90 PSI)

*) Please select a socket to suit the screwdriver type from our brochure Inserting Tools D3320E page 16 and add this part to your order.